



Key Feature

- 10-inch Touch-Screen Indoor Station
- Wi-Fi, standard PoE/ 12 VDC
- TF card, max 128 G, stores messages and pictures
- 8-ch alarm input, 2 alarm output, 1x485
- Remote unlocking via the client or the APP
- Views live videos of door stations and linked cameras

Specification

System parameters	
Operation system	Embedded Linux operation system
Flash	32 MB
RAM	128 MB
CPU	Embedded processor
Display parameters	
Size	10.1-inch
Operation method	Capacitive touch screen
Type	Colorful TFT screen
Resolution	1024 × 600
Video parameters	
Video compression standard	/
Lens	Not supported.
FOV	/
WDR	/
Pixel	/
Focal length	/


Audio parameters	
Audio compression standard	G.711 U
Audio input	Built-in omnidirectional microphone
Audio output	Built-in loudspeaker
Audio compression bitrate	64 Kbps
Audio quality	Noise suppression and echo cancellation
Volume adjustment	Adjustable
Capacity	
Linked IPC	16
Linked indoor extensions	5
Notices	200
Linked doorphone	8
Network parameters	
Communication protocol	TCP/IP, SIP, RTSP
Wired network	10/100 Mbps self-adaptive
Wi-Fi	Wi-Fi 802.11 b/g/n
Bluetooth	/
3G/4G	/
Zigbee	/
Device interfaces	
Alarm input	8-ch alarm inputs
TAMPER	/

Network interface	1 RJ-45 10/100 Mbps self-adaptive
RS-485	1
USB	0
TF card	Max to 128 G, SD 2.0 or lower version
Alarm output	2
Power interface	1
General	
Button	0
Installation	Surface mounting
Indicator	0
Weight	1118 g (with packaging) 660 g (without packaging)
Protective level	/
Power supply method	IEEE802.3af, standard PoE 12 VDC/1 A
Working temperature	-10 ° C to 55 ° C (14 ° F to 131 ° F)
Working humidity	10% to 90%
Dimensions	254 mm × 166 mm × 22.55 mm (10.0" × 6.5" × 0.89")
Battery	/
Application environment	Indoor
Power consumption	≤ 6 W
Language	English, French, Portuguese (Brazil), Spanish, Russian, German, Italian, Polish, Arabic, Turkish, Vietnamese, Hungarian, Dutch, Romanian, Czech, Bulgarian, Ukrainian, Croatian, Serbian, Greek, Portuguese, Slovak

Available Model

DS-KH8520-WTE1

Dimension

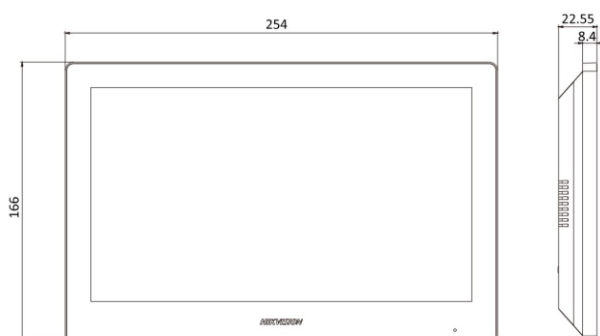

Accessory

Optional

DS-KD8003-IME1/Flus h KD8 Series Pro Modular Door Station	DS-KD9613-FE 6 Facial Door Station	DS-KABH6320- T Indoor Station Table Bracket

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

